

UWDM-S10T41G


Ultra-wideband Frequency Doubler

Description


The UWDM-D10T41G is an ultra-wideband frequency doubler. This doubler utilizes our company's patented ultra-wideband balun, which enables low-cost implementation. This doubler produces output signals from 10 to 41 GHz with low conversion loss and high fundamental and 3rd harmonic suppression.

Features

- ✓ Low cost
- ✓ Input 5 to 20.5 GHz
- ✓ Output 10 to 41 GHz
- ✓ 10 dB Typical Conversion Loss
- ✓ 35 dB Typical Fundamental Suppression
- ✓ 50 dB Typical 3rd Harmonic Suppression
- ✓ Package options:
 - 01 Housing: 0.71" × 0.7" × 0.4"
 - 02 Carrier : 0.6" × 0.32" × 0.04"



carrier type




Housing type

Electrical Specifications

Parameter	Input (GHz)	Output (GHz)	Min	Typical	Max
Conversion Loss (dB)	5 ~ 20.5 (F)	10 ~ 41 (2F)		10	12
Fundamental Suppression (dBc)		5 ~ 20.5		35	
3rd Harmonic suppression (dBc)		15 ~ 61.5		50	
Input Level (dBm)				15	


Dimension & Ports Description (for carrier type)

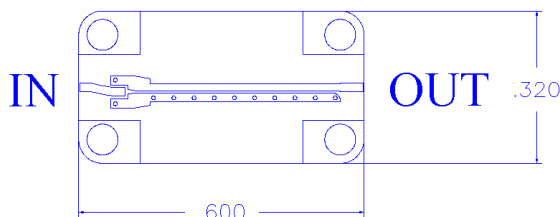


UWDM-S10T41G

Ultra-wideband Frequency Doubler


Conversion Loss

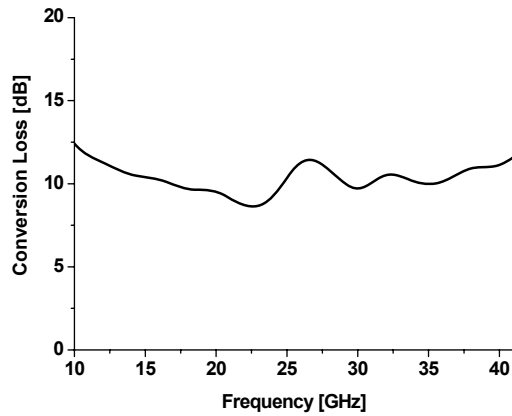


Input VSWR

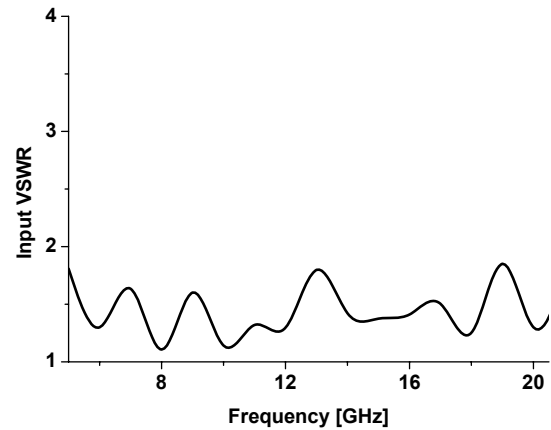

Fundamental Freq. Suppression

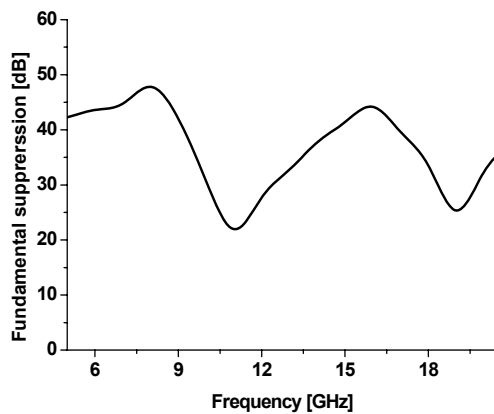

Output VSWR

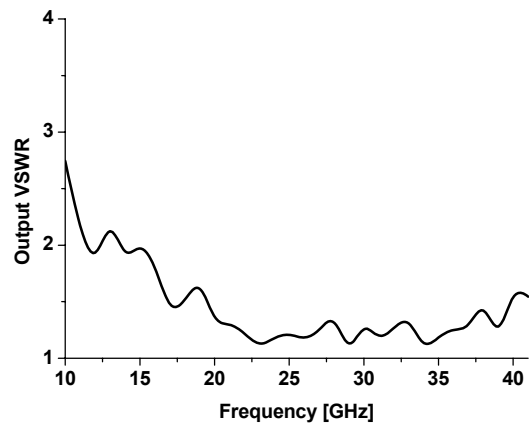

3rd Harmonic Suppression

